

For Machine Vision

C 35 16 — M

35 m m 1 : 1 . 6

(K P S P E C .)

1. Model	C 3516-M
2. Application	For Machine Vision 2/3 Format Mega-pixel Camera
3. Specification	
3-1. Physical (As per the attached drawing)	
(1) Dimensions	$\phi 29.5 \text{ mm} \times 35.4 \text{ mm}$
(2) Weight	64 g
(3) Mount	C-Mount (1 – 32 UN – 2A)
(4) Filter Screw Size	$\phi 27 \text{ mm}$, P = 0.5 mm
3-2. Optical	
(1) Focal Length	35 mm $\pm 5\%$
(2) Max. Aperture Ratio	1 : 1.6
(3) Iris Range	F / 1.6 to F / 16
(4) Angle of View	Diagonal 18.39° Horizontal 14.76° Vertical 11.10°
(5) Picture format	8.8 mm $\times$ 6.6 mm
(6) Focusing Range	Inf. to 0.4m
(7) Back Focal Length	11.85 mm
(8) Flange Back Length	17.526 mm $\pm$ 0.05 mm
3-3. Mechanical	
(1) Focusing Mechanism	Straight Helicoid Rotation Angle 148.2° Rotation Torque 0.2 N·cm to 7.0 N·cm Focus Ring can be fixed at any positions by 3 fixing screws ㉠ (refer to external view)
(2) Iris Mechanism	Non-click Rotation Angle 92.4° Rotation Torque 0.5 N·cm to 7.0 N·cm Iris Ring can be fixed at any positions by 3 fixing screws ㉡ (refer to external view)

				Approved	Checked	Drawn	Drawing Title
							SPEC. SEET
No.	Revisions	Date	By				
PENTAX Precision Co.,Ltd.				Data Drawn JUL. 11, '03		Drawing Number 33500-X001-00KP-B13	

3-4. Vibration & Shock Test Standard

(1) Vibration Conditions

Wave	Sine Wave
Acceleration	1.96 m/s^2 to 59.78 m/s^2
Cycle Range	10 Hz to 55 Hz
Cycle Period	3 Minutes
Duration of Vibration	120 Minutes Respectively in Three Dimensional Directions

(2) Shock Conditions


Tester	Shock Testing Machine by Dropping
Impact Force	588 m/s^2
Duration of Shock	3.5 ms
Directions & Number of Times	1 Time Respectively in Three Dimensional Directions

3-5. Environmental Temperature Range -20°C to $+50^{\circ}\text{C}$


4. Accessories

- | | |
|--|------------------------------|
| (1) Front Lens Cap | 1 piece |
| (2) Rear Lens Cap | 1 piece |
| (3) Fixing Screw for Focus Ring
(Thumbscrew M1.4) | 1 piece (For Optional Usage) |
| (4) Fixing Screw for Iris Ring
(Thumbscrew M1.4) | 1 piece (For Optional Usage) |
| (5) Packing Box | 1 piece |

				Approved	Checked	Drawn	Drawing Title
							SPEC. SEET
No.	Revisions	Date	By				
PENTAX Precision Co.,Ltd.				Data Drawn JUL. 11, '03		Drawing Number 33500-X001-00KP-B23	

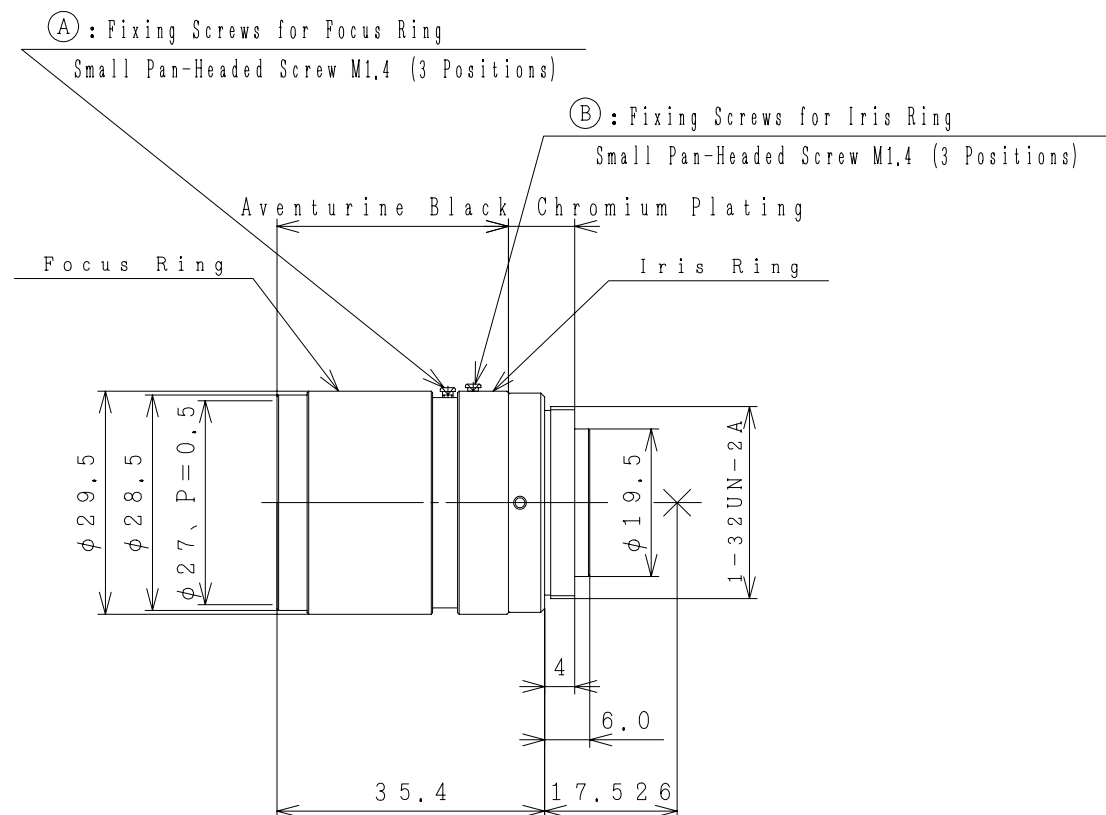

16¹ · 8 · 4 · 2 1.6 C3516-M

3 2 1				尺度 N. T. S.		個数	
訂 正 記 事				年 月 日	担 当	名 称 C 3 5 1 6 - M 3 5 mm 1 : 1.6 E x t e r n a l V i e w	
承認		設計	製図	検図	完図 JUL. 11. ' 03 年 月 日		図面番号 33500 - X001 - 00KP - B33
PENTAX Precision Co., Ltd.							