







Table of Contents



1.	Quick Facts	3
2.	Electrical Characteristics	5
2.1	Absolute Maximum Ratings	5
2.2	Recommended Operating Conditions	5
3.	Dimensional Diagrams	6
3.1	DMK 37CX290-I67 Board Camera	6
4.	Spectral Characteristics	7
4.1	Spectral Sensitivity - IMX290LLR-C	7
5.	FPD-Link Serializer I/O Signals	8
6.	I2C I/O Expander Configuration	9
7.	I2C Devices	10
8.	Status LFDs	11



1 Quick Facts

General				
Dynamic Range	12 bit			
Resolution	1920x1080			
Frame Rate at Full Resolution	60			
Pixel Formats	12-Bit Monochrome			

Optical Interface			
Sensor Type	Sony IMX290LLR-C		
Shutter Type	Rolling		
Sensor Format	1/2.8 inch		
Pixel Size	2.9 µm		

Electrical Interface				
Interface	FPD-Link III via FAKRA connector			
Supply voltage	10-27V			
Current consumption	approx 80 mA @ 18 VDC			

Mechanical Data				
Dimensions	H: 36 mm, W: 36 mm, L: 60.3 mm			
Mass	80 g			
Protection Class	IP6K6, IP6K7 (ISO 20653)			

Adjustments				
Shutter	15 μs to 1 s			
Gain	0 dB to 72 dB			

Environmental	
Temperature (operating)	-5 °C to 45 °C
Temperature (storage)	-20 °C to 60 °C
Humidity (operating)	20 % to 80 % (non-condensing)
Humidity (storage)	20 % to 95 % (non-condensing)

Quick Facts



Electrical Characteristics



2 Electrical Characteristics

2.1 Absolute Maximum Ratings

Item	Symbol	Pins	Min	Max	Unit
Supply voltage	V_COAX		-0.3	+27.0	V


2.2 Recommended Operating Conditions


Item	Symbol	Pins	Min	Тур	Max	Unit
Supply voltage	V_COAX		9.0	18.0	24.0	V




3 Dimensional Diagrams


3.1 DMK 37CX290-I67 Board Camera

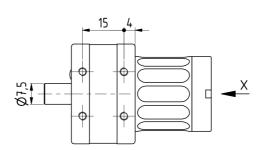




*) available in different lengths

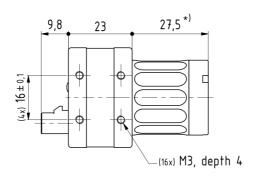






Scale: 1: 1
Dimensions: mm
Tolerances: DIN ISO 2768-m
275-20-1-01-00-c (w/o tripod-adapter)



4 Spectral Characteristics

4.1 Spectral Sensitivity - IMX290LLR-C

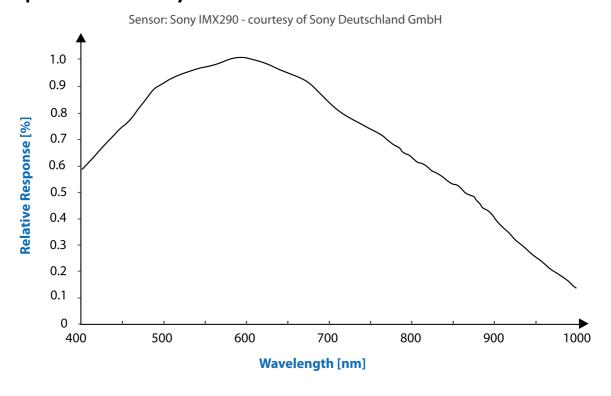

FPD-Link Serializer I/O Signals



5 FPD-Link Serializer I/O Signals

The serializer chip DS90UB953-Q1 (Texas Instruments) has 4 GPIO pins. Their purpose is described in the following table:

Pin	Name	Dir	Description
17 (GPIO0)	NC	-	Not connected
18 (GPIO1)	NC	-	Not connected
27 (GPOI2)	NC	-	Not connected
28 (GPOI3)	RESERVED1_GPIO3	I/O	Reserved signal

The serializer's CLK_OUT (19) pin is connected to the sensor's clock input. This means that the sensor's clock frequency is controlled through serializer PLL registers.

I2C I/O Expander Configuration



6 I2C I/O Expander Configuration

Various I/O functionalities of the camera are controlled through a I2C I/O Expander.

The TCA6408A part has the 7-bit I2C-address 0x20. The table below depicts which signals can be controlled through this expander:

I/O Pin	Name	Dir	Description
P0	CAM_PWR	0	Enable CMOS sensor power supply 0: Sensor power disabled 1: Sensor power enabled
P1	RESET	0	CMOS sensor reset signal 0: Sensor is in reset state 1: Sensor is in operational state
P2	GPOUT_LEVEL	0	If GPOUT_SELECT = 0:>0: LED1 off>1: LED1 on
P4	GPOUT_SELECT	0	0: Control LED via GPOUT_LEVEL 1: Reserved
P5	RESERVED_5	0	Reserved
P6	RESERVED_6	0	Reserved
P7	RESERVED_7	0	Reserved



7 I2C Devices

There are multiple I2C devices on the DMK 37CX290-I67 sensor board. The following table describes the parts and their I2C addresses:

Address (7-bit)	Device	Description
0x1A	IMX290LLR-C	Image Sensor
0x20	TCA6408A	I/O Expander
0x50	AT24C256C	EEPROM
0x57	AT24C02C	EEPROM



8 Status LEDs

There is one status LED on the serializer board:

Name	Color	Description
LED1	Green	Controlled through GPOUT_LEVEL on the I/O expander



DMK 37CX290-I67

All product and company names in this document may be trademarks and tradenames of their respective owners and are hereby acknowledged.

The Imaging Source Europe GmbH cannot and does not take any responsibility or liability for any information contained in this document. The source code presented in this document is exclusively used for didactic purposes. The Imaging Source Europe GmbH does not assume any kind of warranty expressed or implied, resulting from the use of the content of this document or the source code.

The Imaging Source Europe GmbH reserves the right to make changes in specifications, function or design at any time and without prior notice.

Last update: May 2021

© 2021 The Imaging Source Europe GmbH

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other noncommercial uses permitted by copyright law.

All weights and dimensions are approximate. Unless otherwise specified, the lenses shown in the context of cameras are not shipped with these cameras.

Headquarters:

The Imaging Source Europe GmbH Überseetor 18, D-28217 Bremen, Germany Phone: +49 421 33591-0

North & South America:

The Imaging Source, LLC 6926 Shannon Willow Rd, S 400, Charlotte, NC 28226, USA Phone: +1 704-370-0110

Asia Pacific:

The Imaging Source Asia Co., Ltd. 2F., No.8, Xinhu 1st Road Taipei City 114, Neihu District, Taiwan Phone: +886 2-2792-3153

www.theimagingsource.com